



#UnbottleTheFuture

CATALOGUE

Our commitment, the best for your equipment



OUR SERVICES

- ACCREDITED WATER ANALYSIS
- WATER TREATMENT SOLUTIONS
- STERILIZATION SYSTEMS
INSTALLATION & MAINTENANCE
- WATER SOFTENER
INSTALLATION & MAINTENANCE
- WATER MAKERS
INSTALLATION & MAINTENANCE
- WATER FILTRATION SYSTEMS
- CO2 WATER DISPENSERS
- CONSUMABLES, FILTERS,
PARTS & MORE



TABLE OF CONTENTS

TESTING	PAGE 1-2
SOFTENER	PAGE 3
DISPENSERS	PAGE 4
DOSING SYSTEMS	PAGE 5
CHEMICALS	PAGE 6-7
FILTRATION SYSTEM	PAGE 8
FILTER HOUSINGS	PAGE 9
FILTERS	PAGE 10-19
SPARES	PAGE 20

TESTING



HYDROCARE WATER TESTING RANGE

Description : Explore our wide range of testing equipment tailored for all your needs. From ensuring fresh water safety for Legionella and potability to convenient test strips covering parameters like hardness, pH, hydrogen peroxide, chlorine, and more. For precise analysis, rely on our high-quality photometers delivering accurate readings across various parameters. Trust our expertise to meet your testing requirements efficiently and effectively.



HC-FULL-AN-KIT

ISO & 17025 ACCREDITED WATER ANALYSIS

Legionella QTY : 3 points
 Potability QTY : 3 points
 Minerals : 1 point
 Sterilization : SaniSafe
 Protection : 3 x sterilized gloves
 Packaging : Isotherm Box
 Other : Water analysis form & Ice pack



HC-TEST STRIP

RANGE OF TEST KIT STRIPS

Capacity : 50 & 100 strips
 Test : NaCl, Th, H₂O₂, Cl
 Concentration : >99,9%
 Application : Water treatment



HC-AS-FPR

SILVER ION PHOTOMETER

Testing range : 1,000 mg-L
 Protection : IP67
 Conformity : USEPA
 Application : Water treatment

TESTING



HYDROCARE WATER TESTING RANGE



HC-IDIP-PHOTOM

IDIP PHOTOMETER

Bluetooth : Yes
 Phone application : Apple, Android
 Waterproof : Yes (IP67)
 Multilingual : Yes
 Test range : 40 available (4 pre installed)
 Application : Water treatment



HC-STRIP

RANGE OF TEST STRIPS IDIP COMPATIBLE

ammonia, bromine, calcium hardness, chloride,
 free chlorine, nitrite & more
 Qty : 50 strips
 Application : Water treatment



HC-AC-STRIP

AQUACLEAN TEST STRIPS

Range : Low (0-100ppm) High (0-10000)
 Qty : Small (50 strips) Large (100 strips)
 Application : Water treatment

SOFTENER



AQUASOFT WATER SOFTENER

Description : AquaSoft is a compact and efficient water softener. It uses a special cationic resin to remove the hardness from water without consuming electricity. This is the ideal choice for yachts or villas, where space and weight are at a premium. This system, is both economical and environmentally friendly.



HC-AS3000-38

PREMIUM WATER SOFTENER

Pressure min-max : 2 min - 6 max
 Operating flow : 2000 L/H - Peak flow : 3000 L/H
 Pressure drop : 0,5 bars
 Resin volume : 2 x 3,2L
 Water consumption (salt regeneration) : 2 x 16L
 Regeneration time : 2 x 15mn
 Box dimensions : 480 X 505 X 515 mm



HC-AS3000-38

PREMIUM WATER SOFTENER SALT

Capacity : 25 KG
 Material : Sodium chloride
 Chemical formula : NaCl
 Concentration : >99,9%
 Application : Water treatment
 CAS : 7647-14-5



HC-AS-FPR

WATER FLOW PRESSURE REGULATOR

Nominal size : 3/4" x 3/4"
 Temp range : 15°C - 225°C
 Flow : 285,0 mm2
 Set pressure : 1 bar
 Application : Water treatment

DISPENSERS



WATER DISPENSERS

Description : AquaUnity is a compact and efficient water dispenser. Providing filtered, fresh, and fizzy hydration at your fingertips. With its advanced filtration system, enjoy crisp and clean water every time. Whether you prefer still or sparkling, this dispenser offers customizable options to suit your taste. Perfect for yachts, homes and offices, our dispenser ensures you stay hydrated with pure refreshment throughout the day.



HC-AU-DISP

PREMIUM WATER DISPENSERS

Refrigeration : 3 to 210 L/H
Power supply : 180 W, 230 V, 50 Hz
Application : Water filtration
Warranty : 2 Years



HC-DISP-TAP

PREMIUM WATER TAP

Form : 1, 3 or 5 way tap
Material available : Chrome, Inox
Application : Water filtration co2
Power supply : No 100% mechanical
Warranty : 2 Years



HC-DISP-TAP-ELEC

PREMIUM WATER TAP ELECTRIC

Power supply : 180 W, 230 V, 50 Hz
Application : Water filtration co2
Form : 3 way tap
Material available : Chrome, Inox
Warranty : 2 Years

DOSING SYSTEMS



HYDROCARE DOSING SYSTEMS RANGE

Description : DosiCare & DosiCare+ are equipped with high-quality degassing dosing pump, designed to prevent air bubble buildup, ensure precise chemical injection, and maintain consistent flow in pressurized systems. All dosing pumps feature a full PTFE diaphragm and are very durable. The pumps are supplied complete with intake filter, injection valve, hoses and personalized mounting plates. Input : 4-20 mA, 0-10 V, Pulse, Pulse emitting water meter, Level Alarme (optional). Features : Constant, Divide, Multiply, PPM, Batch, Volt, mA, %, ml/q. 230V



HC-DOS-SYSTEM-50

DOSICARE+ DOSING SYSTEM 50 L TANK

bactericide / bacterial endospores / bacteria
anti-biofilm
fungicide / fungi
virucidal / viruses
H2O2 Ag+

Availability tank (L)

50 100



HC-DOS-SYSTEM

DOSICARE DOSING SYSTEM 10 L

bactericide / bacterial endospores / bacteria
anti-biofilm
fungicide / fungi
virucidal / viruses
H2O2 Ag+

Availability container (L)

10



HC-AC-STRIP

AQUACLEAN TEST STRIPS

Range : Low (0-100ppm) High (0-10000)
Qty : Small (50 strips) Large (100 strips)
Application : Water treatment
H2O2 hydrogen peroxide

CHEMICALS



HYDROCARE CHEMICAL RANGE

Description : AquaClean is a highly concentrated disinfectant H2O2 Ag+ designed for application within water systems. Its remarkable efficacy is achieved with minimal quantities, rendering AquaClean Ag+ a dependable solution for professional users. Drinking water equipment, Tank and water system disinfection, Legionella prevention.



HC-AC50-10

AQUACLEAN BIOFILM REMOVER AG+

bactericide / bacterial endospores
bactericide / bacteria
levurocidal / yeasts
fungicide / fungi
virucidal / viruses

Availability Packaging (L)

5

10

20

Description : Designed to effectively remove accumulated contaminants, minerals, and sediment from the resin bed, this cleaner revitalizes your system's efficiency and extends its lifespan. Also provides an added layer of protection by eliminating bacteria and Legionella ensuring thorough cleaning without causing damage to the resin bed or other components of your water softener. With regular use, it helps maintain peak performance, ensuring your water softening system continues to deliver softened water that is free from hardness minerals and impurities.



HC-RC3-100ML

RESICLEAN AG+

Resin cleaner
H2O2 Ag+
bactericide / bacteria
virucidal / viruses
Application : Water treatment

Availability Packaging (ML)

100

250

CHEMICALS



HYDROCARE CHEMICAL RANGE

Description : Sodium hypochlorite bleach extract 47/50° is a powerful solution used for disinfection and cleaning purposes. With a concentration of 12.5% active chlorine, it offers effective germ-killing properties, making it ideal for water treatment. This solution is utilized to maintain hygienic standards and prevent the spread of pathogens. Its high potency ensures efficient removal of stains, odors, and microbial contaminants, promoting a clean and safe environment



HC-CL-SODIUM

SODIUM HYPOCHLORITE

bactericide / bacterial endospores

bactericide / bacteria

fungicide / fungi

virucidal / viruses

bleach extract 47/50° & 12.5% active chlorine solution

Availability Packaging (L) **20**

Description : Clearcure is a product that mixed with HC-pure water, removes chlorine from your water system. Clearcure is used in water systems after a choc treatment to remove chlorine from water system for it to be safe to use . It's also used to reduce the smell of chlorinated water.



HC-CC-1KG

CLEARCURE

Chlorine canceller

$C_6H_8O_6$; 176,12 g/mol

Dissolution : 8,700 L with HC-pure water

Qty : 1000g

Availability Packaging (KG) **1**

FILTRATION



UNDERSINK WATER FILTRATION

Description : Innovative filtration unit. Filters water from any source without electricity and without the need for chemicals. For crystal clear water five different filters in line ensure you water is chlorine free, taste and odor free.



HC-ACL-5FLT

AQUACLEAR 5-STAGE FILTRATION UNIT

- Sediment removal
- Water softening and iron removal
- Chlorine and organic matter removal
- Reduces heavy metals concentration
- Bacteria and viruses elimination
- Temp max : 50°
- Fittings : QM type in-line cartridges



HC-ACL-REP-FLT

AQUACLEAR 5-STAGE REPLACEMENT FILTERS

- Sediment removal
- Water softening and iron removal
- Chlorine and organic matter removal
- Reduces heavy metals concentration
- Bacteria and viruses elimination
- Temp max : 50°
- Fittings : QM type in-line cartridges



HC-ACL-ANTIPLUD

AQUACLEAR 5-STAGE LEAKING SENSOR

- Water filtration leaking sensor
- Mechanical
- Temp max : 50°
- Fittings : 6 mm

FILTER HOUSING



WATER FILTER HOUSINGS RANGE

Description : Remove fine particles from your water such as sludge, water discoloration and any other small particles. ACS certified food grade. All our filter housings come with a mounting plate and a key. When installing water filter housing, make sure that there is a pressure regulator upstream, set at 3 bar maximum, and that the filter housing is also protected from any backflow of pressure or hot water from the boiler. It is important not to expose your filter housing to heat, cold or light.

Intended for filtration : First stage of filtration system protection, Sediment-laden water, Rainwater water, Borehole water, Swimming pool & SPA, High retention capacity



HC-FH-BIG

WATER FILTER HOUSING, BIG BLUE 10" & 20"

Certification : Certificate of Sanitary Conformity

Material : Polypropylene reinforced, PET

Pressure max : 8,3 bars (120 psi)

Temp max : 45°

Application : Water filtration

Availability

SIMPLEX

DUPLEX

TRIPLEX



HC-FH-STAND

WATER FILTER HOUSING, MEDIUM 9"3/4

Certification : Certificate of Sanitary Conformity

Material : Polypropylene reinforced, PET

Pressure max : 8,3 bars (120 psi)

Temp max : 45°

Application : Water filtration

Availability

SIMPLEX

DUPLEX

TRIPLEX



HC-FH-SMALL

WATER FILTER HOUSING, SMALL 5" & 7"

Certification : Certificate of Sanitary Conformity

Material : Polypropylene reinforced, PET

Pressure max : 8,3 bars (120 psi)

Temp max : 45°

Application : Water filtration

Availability

SIMPLEX

DUPLEX

TRIPLEX

FILTERS



PLEATED CARTRIDGE FILTER

Description : Remove fine particles from your water such as sludge, water discoloration and any other small particles. for standard filter body ACS certified food grade. When installing water filters, make sure that there is a pressure regulator upstream, set at 3 bar maximum, and that the filter is also protected from any backflow of pressure or hot water from the boiler. It is important not to expose your filter to heat, cold or light.

Intended for filtration : First stage of filtration system protection, Sediment-laden water, Rainwater water, Borehole water, Swimming pool & SPA, High retention capacity



HC-PL-9

ANTI-SEDIMENT FILTER CARTRIDGE, PLEATED

Certification : Certificate of Sanitary Conformity

Material : 100% Polyester

Dimension : 9"3/4

Temp max : 65°- 80°

Application : Water filtration

Available Micron 1 5 10 20 50 100



HC-PL-5

ANTI-SEDIMENT FILTER CARTRIDGE, PLEATED

Certification : Certificate of Sanitary Conformity

Material : 100% Polyester

Dimension : 5"

Temp max : 65°- 80°

Application : Water filtration

Available Micron 1 5 10 20 50 100



HC-PL-20

ANTI-SEDIMENT FILTER CARTRIDGE, PLEATED

Certification : Certificate of Sanitary Conformity

Material : 100% Polyester

Dimension : 5"

Temp max : 65°- 80°

Application : Water filtration

Available Micron 1 5 10 20 50 100

FILTERS



PLEATED CARTRIDGE FILTER



HC-PL-10-BB

ANTI-SEDIMENT FILTER CARTRIDGE, PLEATED

Certification : Certificate of Sanitary Conformity

Material : 100% Polyester

Dimension : 10" BB

Temp max : 65°- 80°

Application : Water filtration

Available Micron 1 5 10 20 50



HC-PL-20-BB

ANTI-SEDIMENT FILTER CARTRIDGE, PLEATED

Certification : Certificate of Sanitary Conformity

Material : 100% Polyester

Dimension : 20" BigBlue

Temp max : 65°- 80°

Application : Water filtration

Available Micron 1 5 10 20 50



HC-NEUTRA-9

FILTER CARTRIDGE, NEUTRALIZER

100

Certification : Certificate of Sanitary Conformity

Material : Condensate neutralizer

Dimension : 9"3/4

Temp max : 65°- 80°

Application : Water filtration


FILTERS



SAN CARTRIDGE FILTER

Description : Remove fine particles from your water such as sludge, water discoloration and any other small particles with the 9-3/4" wound cartridge in SAN, for standard 9"3/4" filter body 4 (248mm) ID28mm OD 21mm, ACS certified food grade. When installing water filters, make sure that there is a pressure regulator upstream, set at 3 bar maximum, and that the filter is also protected from any backflow of pressure or hot water from the boiler. It is important not to expose your filter to heat, cold or light.

Intended for filtration: Fine particles, Sludge, Sand, Dust, Pollen, Hardness, Re-mineralisation, Smell, Taste

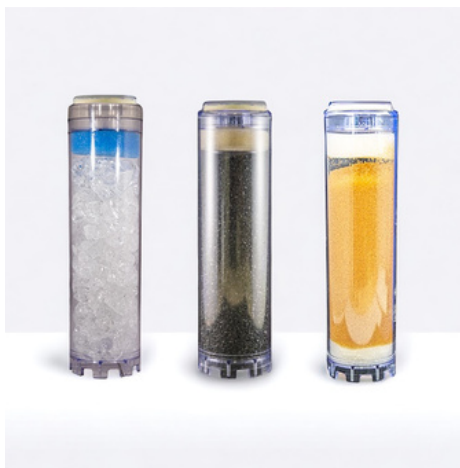

HC-ANTI-HARD

FILTER CARTRIDGE, ANTI-HARDNESS

Certification : Certificate of Sanitary Conformity

Material : Cationic resin

Dimension : 9"3/4"

Temp max : 52°

Application : Water filtration



HC-POLY-9

FILTER CARTRIDGE, POLYPHOSPHATE


Certification : Certificate of Sanitary Conformity

Material : Polyphosphate

Dimension : 9"3/4"

Temp max : 65°- 80°

Application : Water filtration

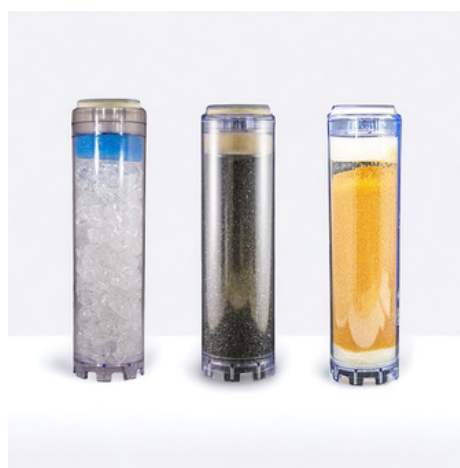

HC-CARBON-9

FILTER CARTRIDGE, CARBON

Certification : Certificate of Sanitary Conformity

Material : Activated carbon

Dimension : 9"3/4"

Temp max : 65°- 80°

Application : Water filtration

FILTERS



POLYWOUND CARTRIDGE FILTER

Description : Remove fine particles from your water such as sludge, water discoloration and any other small particles in Polypropylene wire, PP core, for standard filter body, ACS certified food grade. When installing water filters, make sure that there is a pressure regulator upstream, set at 3 bar maximum, and that the filter is also protected from any backflow of pressure or hot water from the boiler. It is important not to expose your filter to heat, cold or light.

Intended for filtration: Fine particles, Sludge, Sand, Dust, Pollen



HC-PW-9

ANTI-SEDIMENT FILTER CARTRIDGE, POLYWOUND

Certification : Certificate of Sanitary Conformity

Material : 100% Polyester

Dimension : 9"3/4

Temp max : 65°- 80°

Application : Water filtration

Available Micron 1 5 10 20 50 100



HC-PW-7

ANTI-SEDIMENT FILTER CARTRIDGE, POLYWOUND

Certification : Certificate of Sanitary Conformity

Material : 100% Polyester

Dimension : 7"

Temp max : 65°- 80°

Application : Water filtration

Available Micron 1 5 10 20 50 100



HC-PW-5

ANTI-SEDIMENT FILTER CARTRIDGE, POLYWOUND

Certification : Certificate of Sanitary Conformity

Material : 100% Polyester

Dimension : 5"

Temp max : 65°- 80°

Application : Water filtration

Available Micron 1 5 10 20 50 100

FILTERS



POLYWOUND CARTRIDGE FILTER



HC-PW-20

ANTI-SEDIMENT FILTER CARTRIDGE, POLYWOUND

Certification : Certificate of Sanitary Conformity

Material : 100% Polypropylene

Dimension : 20"

Temp max : 65°- 80°

Application : Water filtration

Available Micron 1 5 10 20 50 100



HC-PW-20-BB

ANTI-SEDIMENT FILTER CARTRIDGE, POLYWOUND

Certification : Certificate of Sanitary Conformity

Material : 100% Polypropylene

Dimension : 20" BigBlue

Temp max : 65°- 80°

Application : Water filtration

Available Micron 1 5 10 20 50 100



HC-PW-10-BB

ANTI-SEDIMENT FILTER CARTRIDGE, POLYWOUND

Certification : Certificate of Sanitary Conformity

Material : 100% Polypropylene

Dimension : 10" BigBlue

Temp max : 65°- 80°

Application : Water filtration

Available Micron 1 5 10 20 50 100

FILTERS



CARBON CARTRIDGE FILTER

Description : Eliminate tastes, odours, pesticides, heavy metals, chlorine present in water with the activated carbon cartridge 9"3/4, 7", 5" - Anti taste and odour - for any standard filter body. Coconut carbon. When installing water filters, make sure that there is a pressure regulator upstream, set at 3 bar maximum, and that the filter is also protected from any backflow of pressure or hot water from the boiler. It is important not to expose your filter to heat, cold or light.

Intended for filtration: Tastes, Smells, Heavy metals, Pesticides, Chlorine, Benzene



HC-ACF-9

ACTIVATED CARBON FILTER

Certification : ACS & European Standard EN 12915-1

Material : GAC mineral carbon

Dimension : 9"3/4

Temp max : 52°

Application : Water filtration

Available Micron **5** **10**



HC-ACF-7

ACTIVATED CARBON FILTER

Certification : ACS & European Standard EN 12915-1

Material : GAC mineral carbon

Dimension : 7"

Temp max : 52°

Application : Water filtration

Available Micron **5** **10**



HC-ACF-5

ACTIVATED CARBON FILTER

Certification : ACS & European Standard EN 12915-1

Material : GAC mineral carbon

Dimension : 5"

Temp max : 52°

Application : Water filtration

Available Micron **5** **10**

FILTERS



CARBON CARTRIDGE FILTER

Description : Eliminate tastes, odours, pesticides, heavy metals, chlorine present in water with the activated carbon cartridge 10"BB, 20"BB, 20" - Anti taste and odour -for any standard filter body. Coconut carbon. When installing water filters, make sure that there is a pressure regulator upstream, set at 3 bar maximum, and that the filter is also protected from any backflow of pressure or hot water from the boiler. It is important not to expose your filter to heat, cold or light.

Intended for filtration: Tastes, Smells, Heavy metals, Pesticides, Chlorine, Benzene



HC-ACF-BB

ACTIVATED CARBON FILTER

Certification : ACS & European Standard EN 12915-1

Material : GAC mineral carbon

Dimension : 10" BigBlue

Temp max : 52°

Application : Water filtration

Available Micron 5 10



HC-ACF-20-BB

ACTIVATED CARBON FILTER

Certification : ACS & European Standard EN 12915-1

Material : GAC mineral carbon

Dimension : 20" BigBlue

Temp max : 52°

Application : Water filtration

Available Micron 5 10



HC-ACF-20

ACTIVATED CARBON FILTER

Certification : ACS & European Standard EN 12915-1

Material : GAC mineral carbon

Dimension : 20"

Temp max : 52°

Application : Water filtration

Available Micron 5 10

FILTERS



CARBON AG+ CARTRIDGE FILTER

Description : Eliminate tastes, odours, pesticides, heavy metals, chlorine present in water with the activated carbon cartridge 9"3/4, 7", 5" - Anti taste and odour, Ag+ BACTERICIDE - for any standard filter body. Coconut carbon. When installing water filters, make sure that there is a pressure regulator upstream, set at 3 bar maximum, and that the filter is also protected from any backflow of pressure or hot water from the boiler. It is important not to expose your filter to heat, cold or light.

Intended for filtration: Tastes, Smells, Heavy metals, Pesticides, Chlorine, Benzene, Bactericide



HC-ACF-9-AG

ACTIVATED CARBON FILTER AG+

Certification : ACS & European Standard EN 12915-1

Material : GAC mineral carbon, Ag+

Dimension : 9"3/4

Temp max : 52°

Application : Water filtration

Available Micron **5**



HC-ACF-7-AG

ACTIVATED CARBON FILTER AG+

Certification : ACS & European Standard EN 12915-1

Material : GAC mineral carbon, Ag+

Dimension : 7"

Temp max : 52°

Application : Water filtration

Available Micron **5**



HC-ACF-5-AG

ACTIVATED CARBON FILTER AG+

Certification : ACS & European Standard EN 12915-1

Material : GAC mineral carbon, Ag+

Dimension : 5"

Temp max : 52°

Application : Water filtration

Available Micron **5**

FILTERS



CARBON KDF CARTRIDGE FILTER

Description : Eliminate tastes, odours, pesticides, heavy metals, chlorine present in water with the activated carbon cartridge 9"3/4, 7", 5" - Anti taste and odour - for any standard filter body. Coconut carbon. When installing water filters, make sure that there is a pressure regulator upstream, set at 3 bar maximum, and that the filter is also protected from any backflow of pressure or hot water from the boiler. It is important not to expose your filter to heat, cold or light.

Intended for filtration: Tastes, Smells, Heavy metals, Pesticides, Chlorine, Benzene, Bactericide



HC-ACF-20-AG

ACTIVATED CARBON FILTER AG+

Certification : ACS & European Standard EN 12915-1

Material : GAC mineral carbon, Ag+

Dimension : 20"

Temp max : 52°

Application : Water filtration

Available Micron **5**



HC-ACF-9-KDF

ACTIVATED CARBON FILTER KDF

Certification : ACS & European Standard EN 12915-1

Material : GAC mineral carbon, KDF 160g

Dimension : 9"3/4

Temp max : 52°

Application : Water filtration

Available Micron **5**



HC-ACF-20-KDF

ACTIVATED CARBON FILTER AG+

Certification : ACS & European Standard EN 12915-1

Material : GAC mineral carbon, KDF 160g

Dimension : 20"

Temp max : 52°

Application : Water filtration

Available Micron **5**

FILTERS



DUO CARBON CARTRIDGE FILTER

Description : Mixed activated carbon and anti-sediment cartridges 9 3/4" - 248mm - for all standard filter bodies - ID 28mm -OD 70mm - 5μ filtration to eliminate tastes and odours in the water, 20μ pre-filtration provided by a Meltblown outer sleeve. When installing water filters, make sure that there is a pressure regulator upstream, set at 3 bar maximum, and that the filter is also protected from any backflow of pressure or hot water from the boiler. It is important not to expose your filter to heat, cold or light.



HC-ACF-DUO-9

ACTIVATED CARBON FILTER DUO

Certification : ACS & European Standard EN 12915-1

Material : GAC mineral carbon

Body wrap : Polypropylene

Dimension : 9"3/4

Temp max : 52°

Available Micron : CARBON 5M & ANTI-SEDIMENT 20M



HC-ACF-DUO-7

ACTIVATED CARBON FILTER DUO

Certification : ACS & European Standard EN 12915-1

Material : GAC mineral carbon

Body wrap : Polypropylene

Dimension : 7"

Temp max : 52°

Available Micron : CARBON 5M & ANTI-SEDIMENT 20M



HC-ACF-DUO-20

ACTIVATED CARBON FILTER DUO

Certification : ACS & European Standard EN 12915-1

Material : GAC mineral carbon

Body wrap : Polypropylene

Dimension : 20"

Temp max : 52°

Available Micron : CARBON 5M & ANTI-SEDIMENT 20M

SPARES



Description : Timestrip is a highly reliable time indicator designed to help you keep an eye on how long your cartridges have been in use. It's very easy to use, just stick it to your filter holder using its self-adhesive strip (3M) (be careful not to install it on the bowl or tank) and press the button to release the chemical, which will take 6 months to fill the white surface. **Do not stick the Timestrip to the bowl**



HC-REP-FLT

CARTRIDGE REPLACEMENT INDICATOR

Certification : Certificate of Sanitary Conformity

Operating temperature : 22°

Dimension : 40mm x 19mm

Use : Disposable

Availability (Month) **6** **12**



HC-CO2-BTL

CO2 REPLACEMENT BOTTLE


Certification : Certificate of Sanitary Conformity

Operating temperature : 22°

Use : Disposable

Application : Water dispenser

Availability (KG) **0.6** **2** **4**

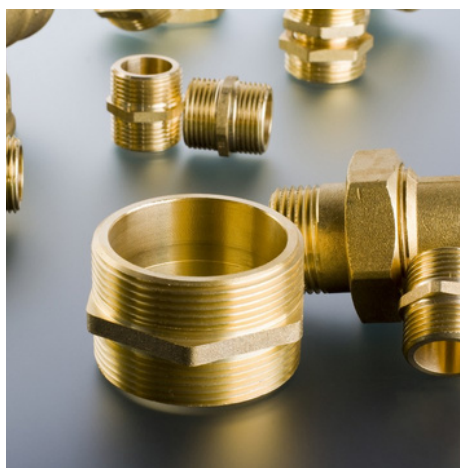

HC-FIT-BRASS

RANGE OF FITTINGS

Certification : Certificate of Sanitary Conformity

Material : Brass, Copper, CPVC, PVC, Stainless steel, Polyethylene, Pipe, Galvanized, PEX

Use : Water treatment

Availability **1/4"** **3/8"** **1/2"** **3/4"** **1"** **1" 1/2"**



Follow us



@hydro_care

CONTACT US



www.hydrocare-eu.com



+33 602 041 571



contact@hydrocare-eu.com