



#UnbottleTheFuture

# CATALOGUE

*Our commitment, the best for your equipment*



# OUR SERVICES

- ACCREDITED ISO 17025 WATER ANALYSIS
- WATER TREATMENT SOLUTIONS
- STERILIZATION SYSTEMS INSTALLATION & MAINTENANCE
- WATER SOFTENER INSTALLATION & MAINTENANCE
- WATER MAKERS INSTALLATION & MAINTENANCE
- WATER FILTRATION SYSTEMS
- CO2 WATER DISPENSERS
- CONSUMABLES, FILTERS, PARTS & MORE



Ensure a reliable freshwater supply on board with our specialized watermaker services, designed for yachts and superyachts.

We provide:

**INSTALLATION**

**MAINTENANCE**

**WINTERIZING**

**REPAIR & TROUBLESHOOTING**

**UPGRADES & OPTIMIZATION**

ENSURING PURE, SAFE WATER ON BOARD





# TABLE OF CONTENTS

## TESTING

PAGE 1-2

## SOFTENER

PAGE 3

## DISPENSERS

PAGE 4-6

## DOSING SYSTEMS

PAGE 7

## CHEMICALS

PAGE 8-9

## FILTRATION SYSTEM

PAGE 10

## FILTER HOUSINGS

PAGE 11

## FILTERS

PAGE 12-21

## SPARES

PAGE 22

# TESTING



## HYDROCARE WATER TESTING RANGE

**Description :** Explore our wide range of testing equipment tailored for all your needs. From ensuring fresh water safety for Legionella and potability to convenient test strips covering parameters like hardness, pH, hydrogen peroxide, chlorine, and more. For precise analysis, rely on our high-quality photometers delivering accurate readings across various parameters. Trust our expertise to meet your testing requirements efficiently and effectively.



### HC-FULL-AN-KIT

#### ISO &17025 ACCREDITED WATER ANALYSIS

Legionella QTY : 3 points  
 Potability QTY : 3 points  
 Minerals : 1 point  
 Sterilization : SaniSafe  
 Protection : 3 x sterilized gloves  
 Packaging : Isotherm Box  
 Other : Water analysis form & Ice pack



### HC-TEST STRIP

#### RANGE OF TEST KIT STRIPS

Capacity : 50 & 100 strips  
 Test : NaCl, Th, H2O2, Cl  
 Concentration : >99,9%  
 Application : Water treatment



### HC-AS-FPR

#### SILVER ION PHOTOMETER

Testing range : 1,000 mg-L  
 Protection : IP67  
 Conformity : USEPA  
 Application : Water treatment

# TESTING



## HYDROCARE WATER TESTING RANGE



### HC-IDIP-PHOTOM

#### IDIP PHOTOMETER

Bluetooth : Yes

Phone application : Apple, Android

Waterproof : Yes (IP67)

Multilingual : Yes

Test range : 40 available (4 pre installed)

Application : Water treatment



### HC-STRIP

#### RANGE OF TEST STRIPS IDIP COMPATIBLE

ammonia, bromine, calcium hardness, chloride, free chlorine, nitrite & more

Qty : 50 strips

Application : Water treatment



### HC-AC-STRIP

#### AQUACLEAN TEST STRIPS

Range : Low (0-100ppm) High (0-10000)

Qty : Small (50 strips) Large (100 strips)

Application : Water treatment

# SOFTENER



## AQUASOFT WATER SOFTENER

**Description :** AquaSoft is a compact and efficient water softener. It uses a special cationic resin to remove the hardness from water without consuming electricity. This is the ideal choice for yachts or villas, where space and weight are at a premium. This system, is both economical and environmentally friendly.



**HC-AS3000-38**

### PREMIUM WATER SOFTENER

Pressure min-max : 2 min - 6 max

Operating flow : 2000 L/H - Peak flow : 3000 L/H

Pressure drop : 0,5 bars

Resin volume : 2 x 3,2L

Water consumption (salt regeneration) : 2 x 16L

Regeneration time : 2 x 15mn

Box dimensions : 480 X 505 X 515 mm



**HC-AS3000-38**

### PREMIUM WATER SOFTENER SALT

Capacity : 25 KG

Material : Sodium chloride

Chemical formula : NaCl

Concentration : >99,9%

Application : Water treatment

CAS : 7647-14-5



**HC-AS-FPR**

### WATER FLOW PRESSURE REGULATOR

Nominal size : 3/4" x 3/4"

Temp range : 15°C - 225°C

Flow : 285,0 mm<sup>2</sup>

Set pressure : 1 bar

Application : Water treatment

# DISPENSERS



## WATER DISPENSERS

**Description :** AquaUnity is a compact and efficient water dispenser. Providing filtered, fresh, and fizzy hydration at your fingertips. With its advanced filtration system, enjoy crisp and clean water every time. Whether you prefer still or sparkling, this dispenser offers customizable options to suit your taste. Perfect for yachts, homes and offices, our dispenser ensures you stay hydrated with pure refreshment throughout the day.



HC-AU-DISP

### PREMIUM WATER DISPENSERS

Refrigeration : 3 to 210 L/H

Power supply : 180 W, 230 V, 50 Hz

Application : Water filtration

Warranty : 2 Years



HC-DISP-TAP

### PREMIUM WATER TAP

Form : 1, 3 or 5 way tap

Material available : Chrome, Inox

Application : Water filtration co2

Power supply : No 100% mechanical

Warranty : 2 Years



HC-DISP-TAP-ELEC

### PREMIUM WATER TAP ELECTRIC

Power supply : 180 W, 230 V, 50 Hz

Application : Water filtration co2

Form : 3 way tap

Material available : Chrome, Inox

Warranty : 2 Years

# TAPS



**HC-ELEC-TAP-1**

**INCLUDED \***

## ELECTRONIC WATER TAP 3 WAY

Tap hole : Ø35mm

Operating options : Chilled, ambient & sparkling

Water connection : 3/8"

Tube connection : Ø6mm

Available materials: stainless steel, chrome & black.



**HC-ELEC-TAP-2**

## ELECTRONIC WATER TAP 5 WAY

Tap hole : Ø35mm

Operating options : Mains ; Chilled, ambient & sparkling

Mains water connection : 3/8"

Tube connection : Ø6mm

Available materials: stainless steel, chrome & black.



**HC-ELEC-TAP-3**

## ELECTRONIC WATER TAP 5 WAY+

Tap hole : Ø35mm

Operating options : Mains ; Chilled, ambient & sparkling

Mains water connection : 3/8"

Tube connection : Ø6mm

Available materials: stainless steel, chrome & black.



**HC-MAN-TAP-4**

## MANUAL WATER TAP 5 WAY

Tap hole : Ø35mm

Operating options : Mains ; Chilled, ambient & sparkling

Mains water connection : 3/8"

Tube connection : Ø6mm

Available materials: stainless steel, chrome & black.

\*AQUAUNITY™ MODELS AIGA™ AND DRIP™ ARE SUPPLIED WITH THE HC-ELEC-TAP-1 FAUCET INCLUDED

# DISPENSERS



## WATER DISPENSERS

**Description :** Premium multifunction tap systems, engineered in the UK. Crafted from 316 stainless steel, Quatreau taps deliver boiling, chilled, sparkling, and filtered water at the touch of a button—perfect for modern homes, luxury kitchens, offices, and yachts.

# quatreau®

by Global Water Solutions



### QUATREAU TT

#### QUATREAU TOUCH TAP

Refrigeration : 20 or 45 L/H chiller

Power supply : 180 W, 230 V, 50 Hz

Application : Water filtration

Warranty : 2 Years

Finish available : Bushed, polished stainless steel;  
Matt black; Dipped 24K Gold



# DOSING SYSTEMS



## HYDROCARE DOSING SYSTEMS RANGE

**Description :** DosiCare & DosiCare+ are equipped with high-quality degassing dosing pump, designed to prevent air bubble buildup, ensure precise chemical injection, and maintain consistent flow in pressurized systems. All dosing pumps feature a full PTFE diaphragm and are very durable. The pumps are supplied complete with intake filter, injection valve, hoses and personalized mounting plates. Input : 4-20 mA, 0-10 V, Pulse, Pulse emitting water meter, Level Alarme ( optional). Features : Constant, Divide, Multiply, PPM, Batch, Volt, mA, %, ml/q. 230V



### HC-DOS-SYSTEM-50

#### DOSICARE+ DOSING SYSTEM 50 L TANK

bactericide / bacterial endospores / bacteria  
anti-biofilm  
fungicide / fungi  
virucidal / viruses  
H2O2 Ag+

Availability tank (L)

50 100



### HC-DOS-SYSTEM

#### DOSICARE DOSING SYSTEM 10 L

bactericide / bacterial endospores / bacteria  
anti-biofilm  
fungicide / fungi  
virucidal / viruses  
H2O2 Ag+

Availability container (L)

10



### HC-AC-STRIP

#### AQUACLEAN TEST STRIPS

Range : Low (0-100ppm) High (0-10000)  
Qty : Small (50 strips) Large (100 strips)  
Application : Water treatment  
H2O2 hydrogen peroxide

# CHEMICALS



## HYDROCARE CHEMICAL RANGE

**Description :** AquaClean is a highly concentrated disinfectant H2O2 Ag+ designed for application within water systems. Its remarkable efficacy is achieved with minimal quantities, rendering AquaClean Ag+ a dependable solution for professional users. Drinking water equipment, Tank and water system disinfection, Legionella prevention.



HC-AC50-10

### AQUACLEAN BIOFILM REMOVER AG+

bactericide / bacterial endospores  
 bactericide / bacteria  
 levurocidal / yeasts  
 fungicide / fungi  
 virucidal / viruses

Availability Packaging (L)

5 10 20

**Description :** Designed to effectively remove accumulated contaminants, minerals, and sediment from the resin bed, this cleaner revitalizes your system's efficiency and extends its lifespan. Also provides an added layer of protection by eliminating bacteria and Legionella ensuring thorough cleaning without causing damage to the resin bed or other components of your water softener. With regular use, it helps maintain peak performance, ensuring your water softening system continues to deliver softened water that is free from hardness minerals and impurities.



HC-RC3-100ML

### RESICLEAN AG+

Resin cleaner  
 H2O2 Ag+  
 bactericide / bacteria  
 virucidal / viruses  
 Application : Water treatment

Availability Packaging (ML)

100 250

# CHEMICALS



## HYDROCARE CHEMICAL RANGE

**Description :** Sodium hypochlorite bleach extract 47/50° is a powerful solution used for disinfection and cleaning purposes. With a concentration of 12.5% active chlorine, it offers effective germ-killing properties, making it ideal for water treatment. This solution is utilized to maintain hygienic standards and prevent the spread of pathogens. Its high potency ensures efficient removal of stains, odors, and microbial contaminants, promoting a clean and safe environment



### HC-CL-SODIUM

#### SODIUM HYPOCHLORITE

bactericide / bacterial endospores

bactericide / bacteria

fungicide / fungi

virucidal / viruses

bleach extract 47/50° & 12.5% active chlorine solution

Availability Packaging (L) 20

**Description :** Clearcure is a product that mixed with HC-pure water, removes chlorine from your water system. Clearcure is used in water systems after a choc treatment to remove chlorine from water system for it to be safe to use . It's also used to reduce the smell of chlorinated water.



### HC-CC-1KG

#### CLEARCURE

Chlorine canceller

C6H8O6 ; 176,12 g/mol

Dissolution : 8,700 L with HC-pure water

Qty : 1000g

Availability Packaging (KG) 1

# FILTRATION



## UNDERSINK WATER FILTRATION

**Description :** Innovative filtration unit. Filters water from any source without electricity and without the need for chemicals. For crystal clear water five different filters in line ensure you water is chlorine free, taste and odor free.



HC-ACL-5FLT

### AQUACLEAR 5-STAGE FILTRATION UNIT

- Sediment removal
- Water softening and iron removal
- Chlorine and organic matter removal
- Reduces heavy metals concentration
- Bacteria and viruses elimination
- Temp max : 50°
- Fittings : QM type in-line cartridges



HC-ACL-REP-FLT

### AQUACLEAR 5-STAGE REPLACEMENT FILTERS

- Sediment removal
- Water softening and iron removal
- Chlorine and organic matter removal
- Reduces heavy metals concentration
- Bacteria and viruses elimination
- Temp max : 50°
- Fittings : QM type in-line cartridges



HC-ACL-ANTIFLUD

### AQUACLEAR 5-STAGE LEAKING SENSOR

- Water filtration leaking sensor
- Mechanical
- Temp max : 50°
- Fittings : 6 mm

# FILTER HOUSING



## WATER FILTER HOUSINGS RANGE

**Description :** Remove fine particles from your water such as sludge, water discoloration and any other small particles. ACS certified food grade. All our filter housings come with a mounting plate and a key. When installing water filter housing, make sure that there is a pressure regulator upstream, set at 3 bar maximum, and that the filter housing is also protected from any backflow of pressure or hot water from the boiler. It is important not to expose your filter housing to heat, cold or light.

**Intended for filtration :** First stage of filtration system protection, Sediment-laden water, Rainwater water, Borehole water, Swimming pool & SPA, High retention capacity

### HC-FH-BIG

#### WATER FILTER HOUSING, BIG BLUE 10" & 20"

Certification : Certificate of Sanitary Conformity

Material : Polypropylene reinforced, PET

Pressure max : 8,3 bars (120 psi)

Temp max : 45°

Application : Water filtration

Availability

**SIMPLEX**

**DUPLEX**

**TRIPLEX**

### HC-FH-STAND

#### WATER FILTER HOUSING, MEDIUM 9"3/4

Certification : Certificate of Sanitary Conformity

Material : Polypropylene reinforced, PET

Pressure max : 8,3 bars (120 psi)

Temp max : 45°

Application : Water filtration

Availability

**SIMPLEX**

**DUPLEX**

**TRIPLEX**

### HC-FH-SMALL

#### WATER FILTER HOUSING, SMALL 5" & 7"

Certification : Certificate of Sanitary Conformity

Material : Polypropylene reinforced, PET

Pressure max : 8,3 bars (120 psi)

Temp max : 45°

Application : Water filtration

Availability

**SIMPLEX**

**DUPLEX**

**TRIPLEX**



# FILTERS



## PLEATED CARTRIDGE FILTER

**Description :** Remove fine particles from your water such as sludge, water discoloration and any other small particles. for standard filter body ACS certified food grade. When installing water filters, make sure that there is a pressure regulator upstream, set at 3 bar maximum, and that the filter is also protected from any backflow of pressure or hot water from the boiler. It is important not to expose your filter to heat, cold or light.

Intended for filtration : First stage of filtration system protection, Sediment-laden water, Rainwater water, Borehole water, Swimming pool & SPA, High retention capacity

### HC-PL-9

#### ANTI-SEDIMENT FILTER CARTRIDGE, PLEATED

Certification : Certificate of Sanitary Conformity

Material : 100% Polyester

Dimension : 9"3/4

Temp max : 65°- 80°

Application : Water filtration

Available Micron

1 5 10 20 50 100

### HC-PL-5

#### ANTI-SEDIMENT FILTER CARTRIDGE, PLEATED

Certification : Certificate of Sanitary Conformity

Material : 100% Polyester

Dimension : 5"

Temp max : 65°- 80°

Application : Water filtration

Available Micron

1 5 10 20 50 100

### HC-PL-20

#### ANTI-SEDIMENT FILTER CARTRIDGE, PLEATED

Certification : Certificate of Sanitary Conformity

Material : 100% Polyester

Dimension : 5"

Temp max : 65°- 80°

Application : Water filtration

Available Micron

1 5 10 20 50 100



# FILTERS



## PLEATED CARTRIDGE FILTER



### HC-PL-10-BB

#### ANTI-SEDIMENT FILTER CARTRIDGE, PLEATED

Certification : Certificate of Sanitary Conformity

Material : 100% Polyester

Dimension : 10" BB

Temp max : 65°- 80°

Application : Water filtration

Available Micron

1 5 10 20 50



### HC-PL-20-BB

#### ANTI-SEDIMENT FILTER CARTRIDGE, PLEATED

Certification : Certificate of Sanitary Conformity

Material : 100% Polyester

Dimension : 20" BigBlue

Temp max : 65°- 80°

Application : Water filtration

Available Micron

1 5 10 20 50



### HC-NEUTRA-9

#### FILTER CARTRIDGE, NEUTRALIZER

100

Certification : Certificate of Sanitary Conformity

Material : Condensate neutralizer

Dimension : 9"3/4

Temp max : 65°- 80°

Application : Water filtration

# FILTERS



## SAN CARTRIDGE FILTER

**Description :** Remove fine particles from your water such as sludge, water discoloration and any other small particles with the 9-3/4 wound cartridge in SAN, for standard 9"3/4 filter body 4 (248mm) ID28mm OD 21mm, ACS certified food grade. When installing water filters, make sure that there is a pressure regulator upstream, set at 3 bar maximum, and that the filter is also protected from any backflow of pressure or hot water from the boiler. It is important not to expose your filter to heat, cold or light.

Intended for filtration: Fine particles, Sludge, Sand, Dust, Pollen, Hardness, Re-mineralisation, Smell, Taste



### HC-ANTI-HARD

#### FILTER CARTRIDGE, ANTI-HARDNESS

Certification : Certificate of Sanitary Conformity

Material : Cationic resin

Dimension : 9"3/4

Temp max : 52°

Application : Water filtration



### HC-POLY-9

#### FILTER CARTRIDGE, POLYPHOSPHATE

Certification : Certificate of Sanitary Conformity

Material : Polyphosphate

Dimension : 9"3/4

Temp max : 65°- 80°

Application : Water filtration



### HC-CARBON-9

#### FILTER CARTRIDGE, CARBON

Certification : Certificate of Sanitary Conformity

Material : Activated carbon

Dimension : 9"3/4

Temp max : 65°- 80°

Application : Water filtration

# FILTERS



## POLYWOUND CARTRIDGE FILTER

**Description :** Remove fine particles from your water such as sludge, water discoloration and any other small particles in Polypropylene wire, PP core, for standard filter body, ACS certified food grade. When installing water filters, make sure that there is a pressure regulator upstream, set at 3 bar maximum, and that the filter is also protected from any backflow of pressure or hot water from the boiler. It is important not to expose your filter to heat, cold or light.

Intended for filtration: Fine particles, Sludge, Sand, Dust, Pollen



**HC-PW-9**

### ANTI-SEDIMENT FILTER CARTRIDGE, POLYWOUND

Certification : Certificate of Sanitary Conformity

Material : 100% Polyester

Dimension : 9"3/4

Temp max : 65°- 80°

Application : Water filtration

Available Micron

1 5 10 20 50 100



**HC-PW-7**

### ANTI-SEDIMENT FILTER CARTRIDGE, POLYWOUND

Certification : Certificate of Sanitary Conformity

Material : 100% Polyester

Dimension : 7"

Temp max : 65°- 80°

Application : Water filtration

Available Micron

1 5 10 20 50 100



**HC-PW-5**

### ANTI-SEDIMENT FILTER CARTRIDGE, POLYWOUND

Certification : Certificate of Sanitary Conformity

Material : 100% Polyester

Dimension : 5"

Temp max : 65°- 80°

Application : Water filtration

Available Micron

1 5 10 20 50 100

# FILTERS



## POLYWOUND CARTRIDGE FILTER



**HC-PW-20**

### ANTI-SEDIMENT FILTER CARTRIDGE, POLYWOUND

Certification : Certificate of Sanitary Conformity

Material : 100% Polypropylene

Dimension : 20"

Temp max : 65°- 80°

Application : Water filtration

Available Micron

**1 5 10 20 50 100**



**HC-PW-20-BB**

### ANTI-SEDIMENT FILTER CARTRIDGE, POLYWOUND

Certification : Certificate of Sanitary Conformity

Material : 100% Polypropylene

Dimension : 20" BigBlue

Temp max : 65°- 80°

Application : Water filtration

Available Micron

**1 5 10 20 50 100**



**HC-PW-10-BB**

### ANTI-SEDIMENT FILTER CARTRIDGE, POLYWOUND

Certification : Certificate of Sanitary Conformity

Material : 100% Polypropylene

Dimension : 10" BigBlue

Temp max : 65°- 80°

Application : Water filtration

Available Micron

**1 5 10 20 50 100**

# FILTERS



## CARBON CARTRIDGE FILTER

**Description :** Eliminate tastes, odours, pesticides, heavy metals, chlorine present in water with the activated carbon cartridge 9"3/4, 7",5" - Anti taste and odour - for any standard filter body. Coconut carbon. When installing water filters, make sure that there is a pressure regulator upstream, set at 3 bar maximum, and that the filter is also protected from any backflow of pressure or hot water from the boiler. It is important not to expose your filter to heat, cold or light.

Intended for filtration: Tastes, Smells, Heavy metals, Pesticides, Chlorine, Benzene



HC-ACF-9

### ACTIVATED CARBON FILTER

Certification : ACS & European Standard EN 12915-1

Material : GAC mineral carbon

Dimension : 9"3/4

Temp max : 52°

Application : Water filtration

Available Micron 5 10



HC-ACF-7

### ACTIVATED CARBON FILTER

Certification : ACS & European Standard EN 12915-1

Material : GAC mineral carbon

Dimension : 7"

Temp max : 52°

Application : Water filtration

Available Micron 5 10



HC-ACF-5

### ACTIVATED CARBON FILTER

Certification : ACS & European Standard EN 12915-1

Material : GAC mineral carbon

Dimension : 5"

Temp max : 52°

Application : Water filtration

Available Micron 5 10

# FILTERS



## CARBON AG+ CARTRIDGE FILTER

**Description :** Eliminate tastes, odours, pesticides, heavy metals, chlorine present in water with the activated carbon cartridge 9"3/4, 7",5" - Anti taste and odour, Ag+ BACTERICIDE - for any standard filter body. Coconut carbon. When installing water filters, make sure that there is a pressure regulator upstream, set at 3 bar maximum, and that the filter is also protected from any backflow of pressure or hot water from the boiler. It is important not to expose your filter to heat, cold or light.

Intended for filtration: Tastes, Smells, Heavy metals, Pesticides, Chlorine, Benzene, Bactericide



**HC-ACF-9-AG**

### ACTIVATED CARBON FILTER AG+

Certification : ACS & European Standard EN 12915-1

Material : GAC mineral carbon, Ag+

Dimension : 9"3/4

Temp max : 52°

Application : Water filtration

Available Micron 5



**HC-ACF-7-AG**

### ACTIVATED CARBON FILTER AG+

Certification : ACS & European Standard EN 12915-1

Material : GAC mineral carbon, Ag+

Dimension : 7"

Temp max : 52°

Application : Water filtration

Available Micron 5



**HC-ACF-5-AG**

### ACTIVATED CARBON FILTER AG+

Certification : ACS & European Standard EN 12915-1

Material : GAC mineral carbon, Ag+

Dimension : 5"

Temp max : 52°

Application : Water filtration

Available Micron 5

# FILTERS



## CARBON CARTRIDGE FILTER

**Description :** Eliminate tastes, odours, pesticides, heavy metals, chlorine present in water with the activated carbon cartridge 10"BB, 20"BB, 20" - Anti taste and odour -for any standard filter body. Coconut carbon. When installing water filters, make sure that there is a pressure regulator upstream, set at 3 bar maximum, and that the filter is also protected from any backflow of pressure or hot water from the boiler. It is important not to expose your filter to heat, cold or light.

Intended for filtration: Tastes, Smells, Heavy metals, Pesticides, Chlorine, Benzene



HC-ACF-BB

### ACTIVATED CARBON FILTER

Certification : ACS & European Standard EN 12915-1

Material : GAC mineral carbon

Dimension : 10" BigBlue

Temp max : 52°

Application : Water filtration

Available Micron 5 10



HC-ACF-20-BB

### ACTIVATED CARBON FILTER

Certification : ACS & European Standard EN 12915-1

Material : GAC mineral carbon

Dimension : 20" BigBlue

Temp max : 52°

Application : Water filtration

Available Micron 5 10



HC-ACF-20

### ACTIVATED CARBON FILTER

Certification : ACS & European Standard EN 12915-1

Material : GAC mineral carbon

Dimension : 20"

Temp max : 52°

Application : Water filtration

Available Micron 5 10

# FILTERS



## CARBON KDF CARTRIDGE FILTER

**Description :** Eliminate tastes, odours, pesticides, heavy metals, chlorine present in water with the activated carbon cartridge 9"3/4, 7",5" - Anti taste and odour - for any standard filter body. Coconut carbon. When installing water filters, make sure that there is a pressure regulator upstream, set at 3 bar maximum, and that the filter is also protected from any backflow of pressure or hot water from the boiler. It is important not to expose your filter to heat, cold or light.

Intended for filtration: Tastes, Smells, Heavy metals, Pesticides, Chlorine, Benzene, Bactericide



### HC-ACF-20-AG

#### ACTIVATED CARBON FILTER AG+

Certification : ACS & European Standard EN 12915-1

Material : GAC mineral carbon, Ag+

Dimension : 20"

Temp max : 52°

Application : Water filtration

Available Micron 5



### HC-ACF-9-KDF

#### ACTIVATED CARBON FILTER KDF

Certification : ACS & European Standard EN 12915-1

Material : GAC mineral carbon, KDF 160g

Dimension : 9"3/4

Temp max : 52°

Application : Water filtration

Available Micron 5



### HC-ACF-20-KDF

#### ACTIVATED CARBON FILTER AG+

Certification : ACS & European Standard EN 12915-1

Material : GAC mineral carbon, KDF 160g

Dimension : 20"

Temp max : 52°

Application : Water filtration

Available Micron 5

# FILTERS



## DUO CARBON CARTRIDGE FILTER

**Description :** Mixed activated carbon and anti-sediment cartridges 9 3/4" - 248mm - for all standard filter bodies - ID 28mm -OD 70mm - 5µ filtration to eliminate tastes and odours in the water, 20µ pre-filtration provided by a Meltblown outer sleeve. When installing water filters, make sure that there is a pressure regulator upstream, set at 3 bar maximum, and that the filter is also protected from any backflow of pressure or hot water from the boiler. It is important not to expose your filter to heat, cold or light.



**HC-ACF-DUO-9**

### ACTIVATED CARBON FILTER DUO

Certification : ACS & European Standard EN 12915-1

Material : GAC mineral carbon

Body wrap : Polypropylene

Dimension : 9"3/4

Temp max : 52°

Available Micron : CARBON 5M & ANTI-SEDIMENT 20M



**HC-ACF-DUO-7**

### ACTIVATED CARBON FILTER DUO

Certification : ACS & European Standard EN 12915-1

Material : GAC mineral carbon

Body wrap : Polypropylene

Dimension : 7"

Temp max : 52°

Available Micron : CARBON 5M & ANTI-SEDIMENT 20M



**HC-ACF-DUO-20**

### ACTIVATED CARBON FILTER DUO

Certification : ACS & European Standard EN 12915-1

Material : GAC mineral carbon

Body wrap : Polypropylene

Dimension : 20"


Temp max : 52°

Available Micron : CARBON 5M & ANTI-SEDIMENT 20M

# SPARES



**Description :** Timestrip is a highly reliable time indicator designed to help you keep an eye on how long your cartridges have been in use. It's very easy to use, just stick it to your filter holder using its self-adhesive strip (3M) (be careful not to install it on the bowl or tank) and press the button to release the chemical, which will take 6 months to fill the white surface. **Do not stick the Timestrip to the bowl**

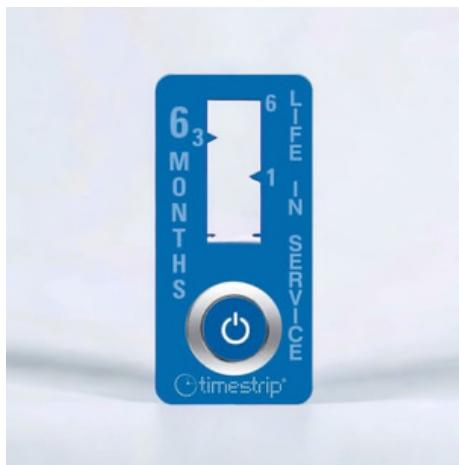

HC-REP-FLT

## CARTRIDGE REPLACEMENT INDICATOR

Certification : Certificate of Sanitary Conformity

Operating temperature : 22°

Dimension : 40mm x 19mm

Use : Disposable

Availability (Month)

6 12



HC-CO2-BTL

## CO2 REPLACEMENT BOTTLE

Certification : Certificate of Sanitary Conformity

Operating temperature : 22°

Use : Disposable

Application : Water dispenser

Availability (KG)

0.6 2 4



HC-FIT-BRASS

## RANGE OF FITTINGS

Certification : Certificate of Sanitary Conformity

Material : Brass, Copper, CPVC, PVC, Stainless

steel, Polyethylene, Pipe, Galvanized, PEX

Use : Water treatment

Availability

1/4" 3/8" 1/2" 3/4" 1" 1 1/2"



*Follow us*



@hydro\_care

## CONTACT US



[www.hydrocare-eu.com](http://www.hydrocare-eu.com)



+33 602 041 571



[contact@hydrocare-eu.com](mailto:contact@hydrocare-eu.com)